

DOG FENCES ★ PET DOORS
**PET STOP of
ALABAMA**
WWW.PETSTOPALABAMA.COM



PET FENCE SYSTEM

Owner's Manual

OT-300 Transmitter
and the LINK App

YOUR LOCAL AUTHORIZED PET STOP DEALER

Pet Stop of Alabama

(205) 982-5196

petstopalabama.com

Service and repair for every major brand

Compiled from Perimeter Technologies, Inc. owner documentation.
Pet Stop® and LINK™ are trademarks of Perimeter Technologies, Inc.

Contents

Part One · The System and Transmitter 3

Introduction	4
Precautions	5
How our system works	6
The transmitter	7
Transmitter programming	9
The receivers	10
Training tips	13
Troubleshooting	15
Warranty	16

Part Two · The LINK App 18

Getting started and registration	19
Account menu	20
Connecting a receiver	22
Settings	23
Pet name, photo and night-light	24
PIN and history	26
Bottom menu	29

OT-300 Transmitter Owner's Guide



PET STOP 

PET FENCE SYSTEMS

Safer by design. Greater peace of mind.™

Introduction

Congratulations on your purchase of the **Pet Stop®** Pet Fence System. You will find with proper training, both you and your pet will enjoy the system for years to come.

The Pet Stop Pet Fence System is the most technologically advanced system on the market today. Unlike other systems, we designed Pet Stop from your pet's point of view. From the development of our exclusive Comfort Contacts® probes to our SafetyStop® shut off feature, your pet's well-being is always our first priority.

Your Pet Stop System comes complete with advanced safety features and one of the strongest warranties available. Your transmitter is backed by a full lifetime warranty which includes any damage caused by lightning. Your pet's receiver collar is completely covered by a lifetime manufacturer's warranty.

For the best results, please read this manual and all accompanying information in its entirety. If you have any questions, please contact your local Pet Stop dealer.

All of us at Pet Stop thank you for the opportunity to provide safety and convenience for both you and your pet. We sincerely appreciate your business.

Pet Stop is proudly designed and manufactured in America.

Precautions

- **DO NOT** use this system for guard dogs or vicious animals. If you believe your dog may pose a threat to others, **DO NOT USE THIS SYSTEM.**
- **DO NOT** use this system as a solid barrier. This product is a deterrent, meant to train pets to remain within an established boundary. It will not work without proper training.
- **DO NOT** permit children to operate the system.
- If you are unsure as to whether or not your dog will be suitable on a Pet Stop System, please speak with your authorized Pet Stop dealer.

.....

Additionally, your system will not work unless you:

- Adjust the collar snug enough for the contact probes to make contact with your pet's skin, but not so tight that it will cause injury. See Page 8 for collar adjustment.
- Replace the receiver battery as required. See Pages 8 and 9 for details.
- Contact your local Pet Stop dealer immediately if the boundary wire is cut or damaged in any way, so they can help you fix the break as soon as possible. See Page 5 for Wire Break Warning System.
- Train your pet properly. See Pages 10 and 11 for Training Tips.

.....

We do not recommend leaving your pet unsupervised while on the system.

.....




To avoid neck irritation, always remove the receiver collar from your pet at the end of the day when your pet is inside. Check your pet's neck frequently for any irritation.



Caution: Changes or modifications to any component, not expressly approved by Perimeter Technologies, Inc. could void the user's authority to operate this equipment.

How Our System Works

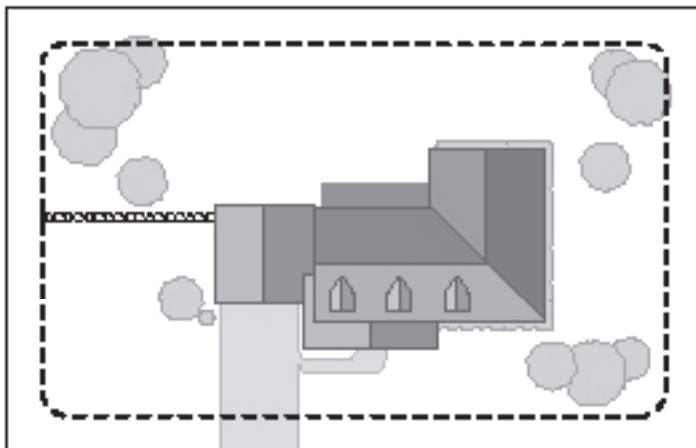

Your Pet Stop dealer has just installed your new Pet Stop Pet Fence System. Here is a review of how it works:

A small wire, approved for underground burial, is buried just beneath the surface of your yard (indicated by the dotted line in illustration above). This wire is connected to a small control unit called a transmitter, which sends a radio signal through the buried wire.

Your pet wears a special computerized receiver collar. If your pet gets too close to the wire, the collar beeps and administers a brief correction. In just a short time, your pet learns to respect the new established boundaries.

As you'll discover, the Pet Stop system is designed to give your pet freedom to run and play in the yard while keeping him out of harm's way.



Please read this Owner's Manual in its entirety to learn more about the transmitter and receiver collar and their features and benefits. If you have any questions about your new Pet Stop system, please contact your local authorized dealer.

The Transmitter

Your transmitter comes complete with these standard features:

Built-in Lightning Protection with Zapp Alert® Warning

Traditionally, lightning is one of the most common causes of transmitter failure. Pet Stop has developed built-in surge and over-voltage protection for both the electrical outlet and any high voltage carried by the buried wire in your yard.

To add extra protection for you and your pet, we have added Zapp Alert®, an audio-visual indication feature should lightning damage your unit. If your transmitter experiences an electrical surge, the transmitter will continue to sound two short beeps. If this happens, contact your local Pet Stop dealer for service immediately.



Remember: Do not allow your pet outside during a lightning storm.

Wire Break Warning System

Your transmitter also has a built-in sensor which monitors the boundary wire. If, for any reason, the wire becomes broken, the transmitter display will flash and a continuous single beep will alert you to the problem. Unplug the transmitter and contact your local Pet Stop dealer to assist you in locating and repairing the wire break correctly.

Fully Adjustable Signal Field

Your transmitter is also completely adjustable. Press the up and down buttons located on the front of the transmitter to adjust the signal field for your specific installation. Please see 'ADJUSTING SIGNAL FIELD' on page 7. The range displayed has a range from 01 to 32. For example, if your range is set to 16 this indicates there is 8 feet of signal field on either side of the boundary wire for a total of 16 feet.



Your Pet Stop dealer has set the signal field range appropriate for your installation. Before adjusting the signal field width contact your dealer.



We recommend that your dog be on a leash or carefully supervised if the transmitter is not functioning.

Turning the Transmitter On and Off

To turn the transmitter off, it is necessary to unplug the transmitter from the wall or from the adapter jack at the bottom of the transmitter housing.

The Transmitter



A. AC Adapter Jack

The AC adapter supplies the power and plugs into your electrical outlet.

B. Programming Buttons

The UP, DOWN and SET buttons are used to program and make adjustments to your system's signal field and stimulation settings.

C. Digital Display

Information concerning the signal field width and collar settings are displayed in the LED display area.

D. Boundary Loop Connections

This is where the "loop" or boundary wire is connected.

E. Ground Wire

A Ground Wire is also connected to the electrical outlet.

Transmitter Programming

You can make adjustments to the signal field width and the stimulation level from your dog's collar receiver. Before making any changes to your system settings, it is always a good idea to make sure that the changes you are going to make were discussed with your installing Dealer.

Adjusting the signal field

Use the following steps to adjust the system's signal field, or how far your dog can approach the buried wire.

1. Hold the SET BUTTON (Center) until the display turns off. Immediately RELEASE the SET button. The current signal field setting will be displayed in the LED and two small red dots will be visible at the bottom of the display indicating program mode.
2. Use the UP and DOWN arrow keys to adjust your boundary setting to your preferred boundary setting. The range displayed has a range from 01 to 32. For example, if your range is set to 16 this indicates there is 8 feet of signal field on either side of the boundary wire for a total of 16 feet.
3. Press SET BUTTON when finished. The number will flash once to indicate a change has been made and return to normal operation. If SET is not pushed, the programming mode will timeout after 40 seconds and return to the previous setting.

Adjusting the collar stimulation level

You can adjust your dog's collar stimulation level, one level at a time as you proceed through the training steps outlined and instructed by your Dealer. Should you reach the highest level, and for some reason have not met your containment goals, discuss higher levels of correction that can be programmed by your Dealer.

1. Hold the SET BUTTON (Center). The current signal field setting will begin to flash in the LED display.
2. After 3 seconds of flashing "98" will appear in the LED display. Release the SET BUTTON.
3. Hold your dog's collar receiver within 2" - 6" of the wall-mount transmitter. Notice that the LOW BATTERY LIGHT will begin to flash.
4. Press the UP button to increase the stimulation one level. Press the DOWN button to decrease the stimulation one level. The receiver will beep twice for a level increase and once indicating a level decrease.
5. Once the UP or DOWN button has been pressed the "98" will cease flashing for two seconds and resume flashing indicating that another programming adjustment can be made if necessary.
6. Press the SET button to save new setting and resume normal operation.

The Receivers

Pet Stop® Receivers

All Pet Stop receivers provide safety and convenience for both you and your pet. The UltraElite, UltraTuff and the UltraMax receivers allow your pet to go anywhere within the boundary you determine, without worrying about your pet experiencing an unintentional correction due to Radio Frequency (RF) interference generated by electrical appliances.

To accomplish this, Pet Stop uses a microprocessor (small computer) in the receiver which analyzes all incoming signals. When a signal is detected, the microprocessor analyzes it in a matter of milliseconds and determines whether it is the Pet Stop signal or a random RF noise. If the signal detected is the Pet Stop signal, the receiver first emits an audible tone and then administers a correction to remind your pet of its boundaries. If the signal is not the Pet Stop signal, the receiver disregards it. This signal processing eliminates false alarms which could confuse your pet and make training difficult.

Your Pet Stop dealer has set the receiver to the appropriate correction setting for your dog(s). Your Dealer will instruct you on the proper adjustment of the stimulation level during the training and maintenance phases.

Flash Alert® Low Battery Light

A dead battery in the receiver is one of the primary reasons a pet might escape the yard. The Pet Stop Flash Alert Low Battery Light alerts you when the battery is nearly depleted. The low battery indicator light will flash red for several days before the battery needs to be changed.

Safety Stop® Shut Off

The Pet Stop Safety Stop is a microprocessor-controlled timing circuit which minimizes the period of time during which your pet can receive a correction. This feature is extremely important if your pet happens to get caught within the signal field. Unlike other systems which continue to pulse or correct up to one hour, the Pet Stop SafetyStop will shut off the correction after 20 seconds.


TriScann® Omni-Directional Antenna

The Pet Stop TriScann antenna ensures that the receiver always detects the radio signal, no matter what position the receiver is in. However, when your dog moves or turns, the receiver will always be ready to remind your dog of the boundary.



To avoid neck irritation, always remove the receiver collar from your pet's neck at the end of the day when your pet is inside. Check your pet's neck frequently for any irritation.

The Receivers

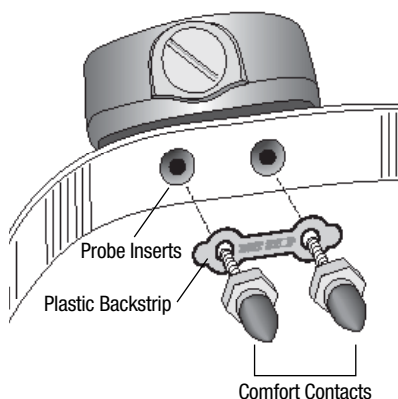

Attaching The Receiver

Attaching the UltraElite or UltraMax receiver to your collar is easy!

1. Place the collar holes over the receiver inserts. Be sure the receiver case is on the outside of the collar.
2. Install the plastic washers with the flat side toward the probes.
3. Attach the probes by screwing them snugly (preferably by hand) into the receiver inserts.




Be careful not to over-tighten the probes. Over-tightening can cause damage to the probes and receiver case.

If you wish to attach the receiver to a collar other than the one provided by your Pet Stop dealer, you must create two holes for the receiver inserts, washers, and probes. Be sure the holes are correctly sized to fit properly. After doing so, follow the above steps to attach the receiver to the collar.

Adjusting the Receiver Collar on your Pet.

It is important that the probes sufficiently make contact with the dog's skin. One finger should fit between the dog's neck and a probe. Your Pet Stop dealer will demonstrate proper collar snugness. Be sure to check the collar every few days for proper snugness. Your dog will not feel a correction if the collar is too loose, and may escape from the yard. Always remove the receiver collar at the end of the day when your pet is inside.

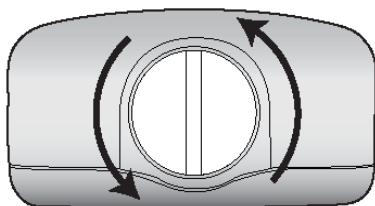

The receiver collar may need adjustment due to changes in your pet's coat, weight and age.

Battery Replacement

To replace the battery, remove the battery cover with any flat-head screwdriver or a coin. Remove the old battery and recycle it. Check with your local municipality for recycling options. Insert the new battery with the positive (+) end UP toward the battery cover. If you are uncertain which side of the battery is the positive side, look closely at the flat side of the battery. You will see a plus (+) mark indicating the positive end.

Battery Maintenance

Battery maintenance is convenient and easy. Your Pet Stop dealer can offer you a battery subscription plan which will make the timing of battery replacement hassle-free. With this plan, you will receive a battery in the mail when it is time to replace it. Ask your Pet Stop dealer for details.

The Receivers

UltraTuff Receiver™



Low Battery Indicator

UltraTuff Receiver™

The UltraTuff Receiver was designed with twice the wall thickness of lesser fencing collars for greater chew and impact resistance and longer life.

Contact your local Pet Stop dealer for a new battery.



Battery Cover

Comfort Contacts® Soft Tip Probes

Our Comfort Contacts probes are an important part of the Pet Stop system. In order for your dog to feel a correction the soft rubber probes need to make contact with the dog's skin.

Your Pet Stop dealer will demonstrate how to properly place the receiver collar on your dog.

Battery Cover

Remove this cover using a flat-ended screwdriver or coin to replace the battery.



Elite SW Receiver



UltraMax Receiver®

Training Tips

Now that your Pet Stop System has been installed and is operational, it is time to train your pet to the system. As explained to you at the time you purchased the system, this product is designed to be used only as a tool to train your pet to stay within the confines of a given boundary. The success for your pet relies upon the training given. Consistency is important and remember to keep the training fun for your dog. Set aside ten minutes twice a day for training and play with your dog often in the yard.

At the time of installation, your Pet Stop dealer will provide an initial training session, and explain to you the procedures to ensure your pet will remain safely behind the chosen boundary. The information contained in this manual will further aid you in training your pet. It is designed so that your pet is thoroughly trained to the system at the program's end.

Precaution:

Taking shortcuts or rushing the program and not following the guidelines provided, may yield unsatisfactory results for both you and your pet.

Warning:

The Pet Stop System should be used only with proper training of your pet. It is not intended as a fool-proof means, such as a solid boundary, of keeping your pet in the yard.

Boundary Training is the most important part of your system. Therefore, it is the sole responsibility of the pet owner to provide training, either personally or through an authorized Pet Stop dealer. Reinforcement of training may be necessary.



Note: If you have reasons to believe that your pet may cause harm to itself or others, you should not rely solely on this system for restraint. Neither Pet Stop nor Perimeter Technologies, Inc. shall be held liable for any damages sustained as a result of your pet crossing the boundary.

Preparing Your Pet For Boundary Training

Your pet should be of sufficient maturity to understand basic training commands and be comfortable walking on a leash before you begin training. Most pet owners find this to be somewhere around four to six months of age, depending on the breed and personality of the dog.

If you are training more than one pet, do so separately. Each deserves the benefit of your full attention.

Training Your Pet

Your Pet's Personality

Your pet's reaction to the training session varies in accordance to its personality. In most instances, your pet will react in one of two ways:

1. Some pets have a great and immediate respect for the boundary. Particularly timid pets stay close to the foundation of your home until they understand where the safety zones are. If this occurs, coax your pet into the safety zone and spend 10 to 15 minutes playing there. By consistently walking your pet around the safety zone, your pet's confidence level will increase. If your pet remains overly timid, reduce your pet's approaches to the boundary every other day.
2. On the other hand, some pets may show little or no reaction when experiencing the correction. If this should occur, check the following:
 - a. *Are the contact probes making contact with the dog's skin?* Make sure the collar is tight enough around the dog's neck. (See page 8)
 - b. *Is your pet's coat trimmed back to one-half inch in the area where the receiver is positioned?*
If your dog has a thick or long coat, it may be necessary to trim back his fur so the contact probes touch the skin. Ask your Pet Stop dealer for help.
 - c. *Is the battery inserted correctly in the receiver?*
Be sure the battery is inserted positive (+) end up.

If your pet still shows little reaction, contact your Pet Stop dealer for adjustments or additional training.



Contact your Pet Stop Dealer immediately if you experience any training problems.

Walking Your Dog Off Property

One method to allow your dog to leave your property during and after the training period is listed below. For other methods, please consult your Pet Stop dealer.

It is important that a consistent routine is established and maintained when walking your pet off the property. Remove the Pet Stop receiver collar, attach a leash to your pet's regular collar and proceed out the point of exit (usually the driveway). Proceed down the driveway and instruct your pet to sit several feet within the boundary. Lay a doormat or strip of carpet over the boundary line. Proceed across the boundary, using a command such as "cross" and proceed on the walk. Follow the same process when you return.

Troubleshooting

Transmitter

Problem: No digital display reading on the transmitter.

1. Make sure the transmitter has not been turned off. Press the UP button once or twice to turn the power on.
2. Check the AC electrical outlet to be certain it is plugged in and supplying power to the transmitter.

We recommend that you plug in something else, like a hair dryer or radio to be sure the outlet is operating properly. Also, if the transmitter is plugged into a GFI outlet, make sure it is reset and functioning properly.

Problem: The Transmitter is beeping and the display is flashing on and off.

1. Make certain that each boundary wire is connected properly to the terminal connections on the transmitter.
2. Make certain that the boundary wire in the yard has not been damaged. You can check this quickly by placing a jumper wire across the loop connections on the transmitter. If the transmitter acts normal when the jumper wire is across the loop connections there is a break in the boundary wire. You can try to locate the break visually, or contact your local Pet Stop dealer for repair.

Receiver

Problem: The Receiver is not detecting the signal from the boundary wire.

1. Make certain that the transmitter is turned on and transmitting a radio signal.
2. Make sure that the receiver battery has been recently replaced and was inserted properly.

If you have checked all of the above and the receiver is still not working, please contact your local Pet stop dealer.

Problem: Pet is not responding to the correction.

1. Check the fit and snugness of the pet's receiver collar. Make certain that the soft probes are making contact with the dog's skin. (See Page 8.) In some case, it may be necessary to shave a portion of the dog's fur in order for the probes to make proper contact.
2. Make sure that the receiver battery has been recently replaced and was inserted properly. (See Page 8.)
3. If your receiver uses Comfort Contacts® with rubber tips make sure they have been replaced. Depending on the pet, these tips may need to be replaced as often as every six months.

Problem: Low battery indicator on the receiver is flashing.

1. When the Low Battery Indicator is flashing it means you need to replace the battery. Refer to the battery replacement section on Page 8 for specific instructions.

Warranty

LIMITED WARRANTY: PERIMETER TECHNOLOGIES, INC. (Manufacturer), subject to the terms and conditions contained herein, hereby warrants that it will repair or replace at its discretion, through an authorized Dealer, the equipment described below that prove defective by workmanship or materials for the period so listed and for a “Replacement Fee” following the warranty period or for defects not covered under warranty. Authorized Dealers are permitted to charge a fee in connection with servicing the equipment described below.

Transmitters	Warranty	Exclusions and Inclusions
OT-100™	Limited Lifetime	24 months from date of purchase, excludes surge damage.
OT-200™	Lifetime	Lifetime, includes damage by electrical surge.
OT-300™	Lifetime	Lifetime, includes damage by electrical surge.
IT-200™	Limited Lifetime	24 months from date of purchase, excludes surge damage.

Receivers	Warranty	Exclusions and Inclusions
Elite Receiver™	Lifetime	Lifetime, includes damage due to a dog chew on a one time occurrence.
UltraElite Receiver®	Lifetime	Lifetime, includes damage due to a dog chew on a one time occurrence.
Elite SW Receiver™	Limited Lifetime	24 months from date of purchase, excludes dog chews.
UltraTuff™	Lifetime	Lifetime, includes damage due to a dog chew on a one time occurrence.

Terms and condition are as follows:

- a. The warranty is limited to the original purchaser of the unit at retail. When requesting warranty service, proof of purchase may be required. A copy of the Sales Agreement may be used.
- b. The unit must be shipped, freight prepaid, or delivered to an authorized Dealer of Manufacturer to render the service provided herein. To locate an authorized Dealer visit the Manufacturer's website at www.petstop.com.
- c. The unit must not have been previously altered, repaired or serviced by anyone other than a service facility authorized by Manufacturer. The unit must not have been subject to accident, misuse, abuse, or operated contrary to the instructions provided with the product. Warranty does not include lost or stolen equipment.

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, NO OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, OTHER THAN THOSE PROVIDED IN WRITING HEREIN, SHALL APPLY TO THIS UNIT. PERIMETER TECHNOLOGIES, INC. SHALL NOT BE LIABLE FOR ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE FOR ANY PERIOD IN EXCESS FOR THE PERIODS OF EXPRESS WARRANTIES PROVIDED ABOVE. IN ADDITION, UNDER NO CIRCUMSTANCES, SHALL PERIMETER TECHNOLOGIES, INC. BE LIABLE FOR PROPERTY DAMAGE, ECONOMIC LOSS, OR ANY CONSEQUENTIAL DAMAGES SUSTAINED IN CONNECTION WITH SAID UNIT. SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU.

PERIMETER TECHNOLOGIES, INC. NEITHER ASSUMES NOR AUTHORIZES ANY REPRESENTATIVE OR OTHER PERSON TO ASSUME FOR IT ANY OBLIGATION OR LIABILITY OTHER THAN SUCH AS IS EXPRESSLY SET FORTH HEREIN. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

PET STOP®

P E T F E N C E S Y S T E M S

Safer by design. Greater peace of mind.™

Perimeter Technologies, Inc - Morgantown, PA 19543
©2010 Perimeter Technologies, Inc. All Rights reserved.

Our products are covered by U.S. Patent Numbers: 5,460,124 - 5,682,839 - 6,296,776.

Pet Stop, Comfort Contacts, Flash Alert, Safety Stop, Pet Fence Systems, The Best Fence You'll Never See, TriScann, Zapp Alert, UltraElite Receiver, Ultramax Receiver, PowerWizard, RoomWizard and The Dog Fence People are registered trademarks of Perimeter Technologies, Inc.

www.petstop.com



LINKTM

A **PET STOP**  **PRODUCT**

User Manual

Getting Started

Download The LINK™ App




LINK™, by Perimeter Technologies grants you access to your pet's Bluetooth enabled collar with the ability to monitor and adjust their training and progress. To get started, go to your smartphone's App Store and search, **Pet Stop Link**. Download the free app to your smartphone and create an account to get started.



Create Account/Register

To begin using LINK™ you must first create a user account. From the **Home** screen, press **Sign Up Here**. You'll be redirected to the **Register** screen. Choose **I Am A Customer** and press **Next**.

In the **Registration** screen, enter your information in the required fields and press **Next**. The Welcome screen will show you who your local dealer is and from there you can continue to sign in by pressing **Take Me To Sign-In**. Now you can log in to your account and start using LINK™.

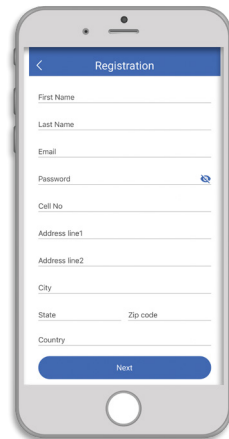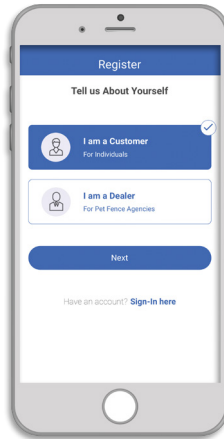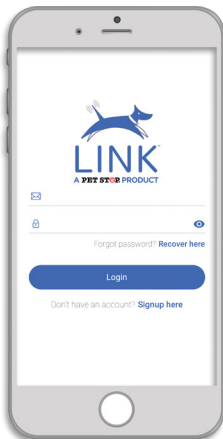

Account Menu

The **Main Menu**  (upper left of the screen, or open by swiping right) is where the user's profile can be viewed and edited, and where the customer can communicate with their dealer. There are three sections that contain these options: **Notifications**, **Help** and **People**.

Notification

Program

The permanent program for a collar is set by the dealer. If a collar needs to be reprogrammed or swapped to a new collar the user must contact the dealer who will transmit a new program via **LINK**. Once the user has been notified the program is sent they can press the **Program** button to download it to the receiver.

Message

Pressing the **Message** button opens a screen where the user can communicate directly with their dealer via **LINK**.


Help

Contact Dealer

Pressing **Contact Dealer** will open a screen that displays the user's dealer information. There are two options, one to send the dealer a message, and one to place an audio call to their phone.

Contact Us

Pressing **Contact Us** opens a screen where the user can communicate with customer service. There is a text box with a drop-down menu. From the drop down, select the reason you are messaging. Once you've selected a reason, you can enter the specific message in the text box. The user can also rate the service with a scale of 1 to 5 stars. This is located directly beneath the text box.

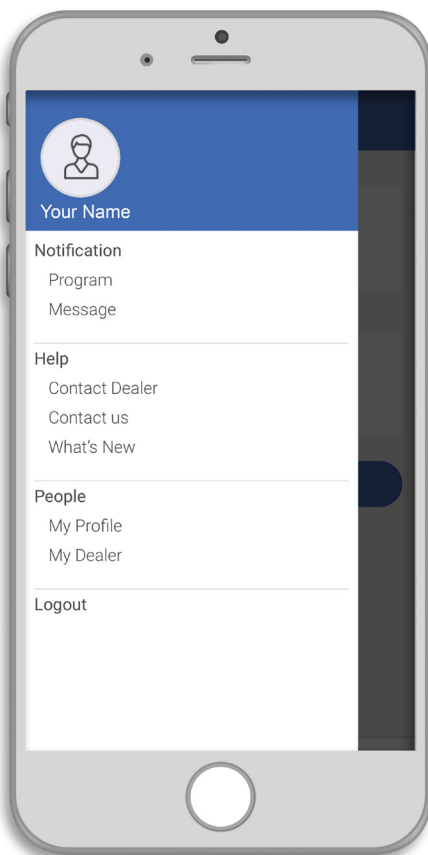

(Help continued from previous page)



What's New

What's New displays news, updates and helpful information to the user.

People

My Profile

My Profile stores your account information including name, address, email address and phone number. You can also change your password and profile picture here. To change any of the profile information, simply press the line you want to change (or **Change Password** to change your password, or **Upload Photo** to change the profile picture) and enter the new information. Once you've made your updates, press **Save** and your profile will now show the changes.

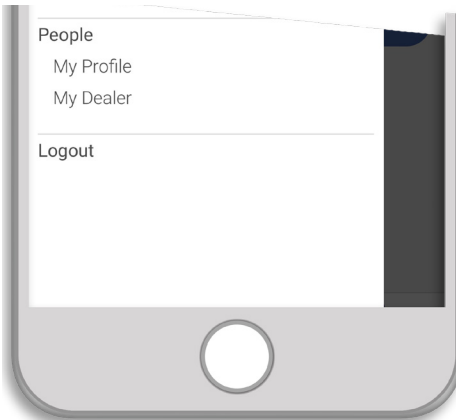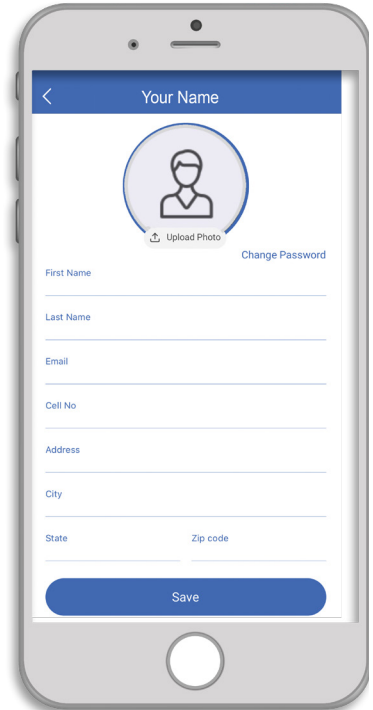

Logout


Pressing **Logout** will sign you out of your current LINK session.

Using Link

Connect/Disconnect Receiver

After signing in you will be taken to the **Paired Collars** screen. To pair, press **Add Collar**. **LINK™** will scan for any collars within Bluetooth range* and populate a list of available receivers. If you have multiple collars and are unsure which you're pairing, you can check the **serial number** on the receiver (located beneath the UPC) which is also displayed on each listing on the screen.

**Bluetooth range can vary. Please be within 10 feet of the receiver when pairing and be sure the battery is charged.*

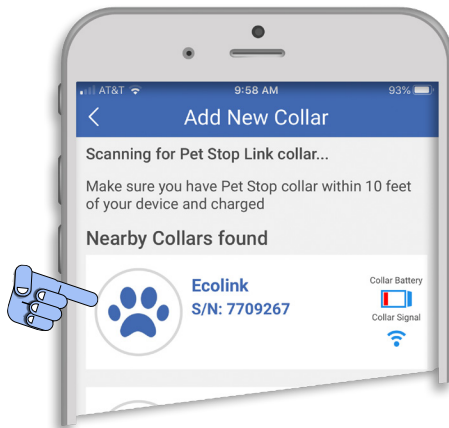


When you select the collar you wish to pair, you will be asked to set a 4-digit **PIN** (we recommend using the last 4 digits of the **serial number**). Once you've entered your **PIN** the **Pet Detail** screen will open. Within the **Pet Detail** (see pg. 10) screen, you can now press **Connect** to activate the collar for use. Once connected, the **Connect** button changes to **Disconnect**, which you can press when you want to disconnect or switch collars.




Settings

The **Settings** menu is in the top right of the **Pet Detail** screen, indicated by the **gear** icon.

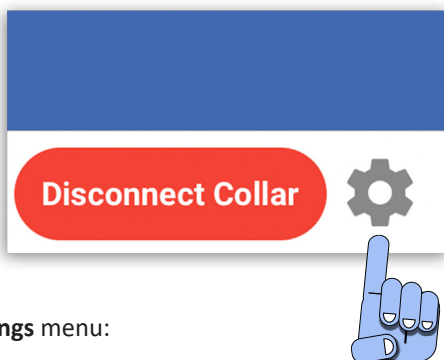


There are three tabs within the **Settings** menu:
Basic, **Gentle Steps**, and **PIN**.

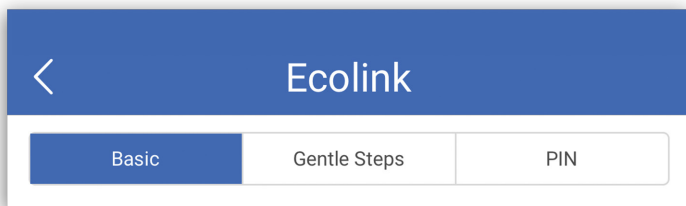


Basic

Under the **Basics** tab you can customize and control several collar options.

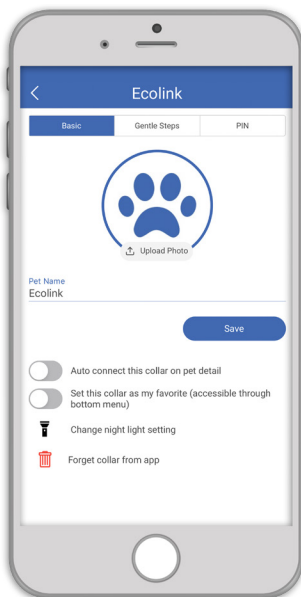

Pet Name and Photo

You can add a photo for the paired collar by pressing **Upload Photo**. From here you can either use a picture from your camera roll or take a new one. Once you've chosen an image, press **Save** and the photo will now display. To add or change the name of the collar, simply press the field below **Pet Name** (directly beneath the **Pet Photo**). A cursor will appear and you can type any name you like. Press **Save** and the collar will display this name until you change it.

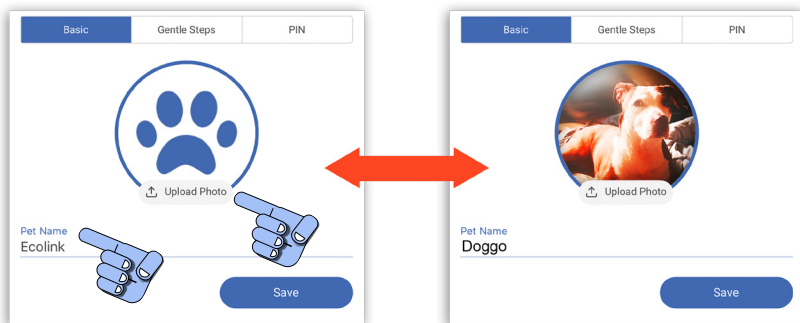

There are four other options that can be controlled from the **Basic** tab.

Auto-Connect:

This allows the collar to automatically connect to **LINK™** when it is selected in the **Pet Detail** screen. To activate this feature, set the switch to **On** and then press **Save**.



Auto connect this collar on pet detail

Set Collar as My Favorite:

If the user has multiple receivers, setting one to **My Favorite** will open that collar into the **Pet Detail** screen upon pressing the **Favorite (heart icon)** button from the **bottom menu** (see pg. 13).



Set this collar as my favorite (accessible through bottom menu)



FAVORITE

Change Night-Light Setting (flashlight icon):

Pressing this option will populate a menu from which the user may choose a time limit on how long the collar's **Night Light** (see pg. 12) will stay on when in use. Simply select a time frame and press **Save**.



Change night light setting

Change night light setting to:

- ☐ 15 minutes
- ☐ 30 minutes
- ☐ 45 minutes
- ☐ 60 minutes
- ☐ 75 minutes
- ☐ 90 minutes
- ☐ 105 minutes
- ☐ 120 minutes

Cancel

Save

Forget Collar From App (trashcan icon)*

To remove a collar profile from **LINK™** press this option. A confirmation box will appear asking if you're sure. If you do want to remove the collar from the app, press **Yes**.



Forget collar from app

Are you sure you want to forget this collar?


No

Yes

**Removed collars will still appear when LINK™ scans for active, charged receivers and can be paired again. The specific details and settings will just need to be re-entered.*

Gentle Steps

Each pet progresses through training at their own speed. You may find that your pet requires a higher or lower level of correction as they work through the program, **Gentle Steps** lets the user increase or decrease the correction level of their pet's collar. The collar program's minimum and maximum correction levels are set by the dealer, but by pressing the "+" or "-", you can adjust the levels within the dealer-set parameters. This is a permanent setting and will remain at the set level until it is reset.

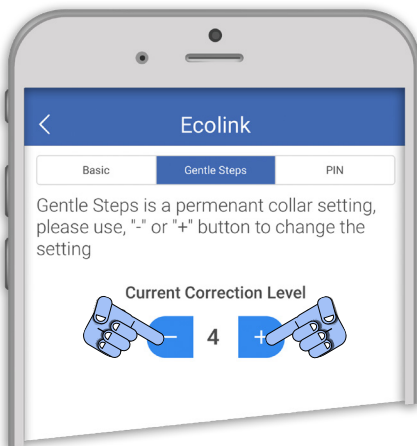



PIN

This is where the user can reset their **PIN** if they choose. Simply enter the new 4-digit **PIN**, confirm it in the **Repeat New PIN** field, and save.

Pet Detail Screen



The **Pet Detail** screen is the main hub of the **LINK™** app, with many useful functions to monitor and adjust your pet's training. From here you can select from multiple collars, customize settings, use the **Remote Trainer**, view your collar's current battery power and signal strength, and turn the receiver's **Night Light** on and off.



History

The **History** tab provides information on how many warnings and corrections your pet has received. These are sorted into, **past 24 hours**, **past 7 days**, and **past 30 days**, to gives you a picture of how your pet has progressed over time. Note, this information may have a bit of a lag as the collar has no internal clock. The **History** screen also displays:

- *pet photo*
- *battery charge*
- *signal strength*
- *when the collar was last synced*
- *serial number*

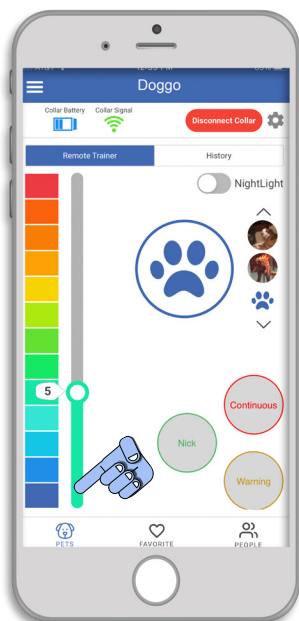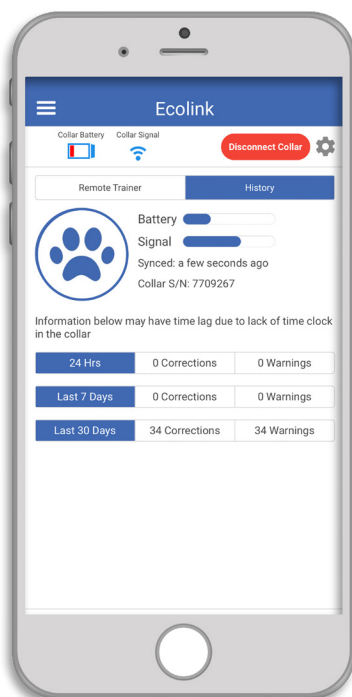


Remote Trainer

The **Remote Trainer** is a feature located in the **Pet Detail** screen. The **Remote Trainer** is a non-permanent (meaning it does not affect your receiver's program) corrective tool that allows you to use the collar for other behavior issues. Use the slider on the left side of the screen to set the intensity level (max level is set by dealer). Once you've chosen the appropriate setting you can now use the three buttons at the bottom right of the screen to administer corrections as needed. There are three different options:


Warning:

Press this button to emit a warning beep. This option does not issue any actual charge.

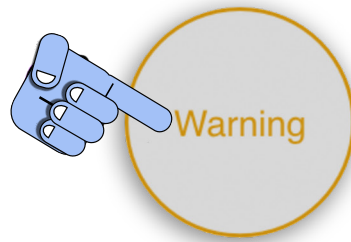


Nick:

When pressed, Nick issues a short, single corrective charge.

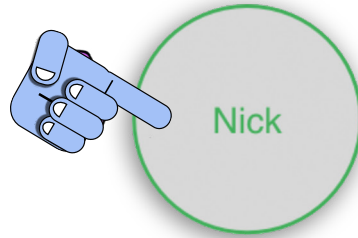

Continuous:


Pressing and holding down this button will issue a series of short corrective charges. The charges will continue as long as it is held.

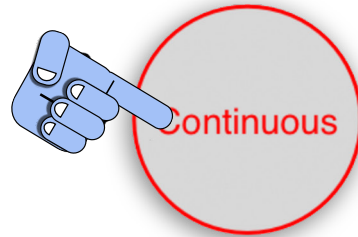


Night Light

The **Night Light** is located below the **History** tab on the **Pet detail** screen. When the Night Light is turned on, the receiver will emit a pulsing light that can help you find your pet in the dark.

The duration of the pulsing light can be set in the **Settings** menu (*see pg. 9*).



Bottom Menu



There is a three-option menu found in the footer of both the **Pet Detail** and **Paired Collars** screens. These three options are:

Pets

When pressed, the **Pets** icon returns the user to the **Paired Collars** screen.



Favorite

If you have multiple collars and have set one as **Favorite** in the **Settings** menu (*see pg. 8*), pressing the **Favorite** icon will take the user to the **Pet Detail** screen with the favorited collar already populated (the **Connect** button must still be pressed to activate, unless it has also been set to **Auto-Connect** in the **Settings** menu (*see pg.10*).



People

The **People** icon directs the user to a screen that contains their profile, their dealer's profile and any other users who've been invited to connect to this **LINK**. Pressing the **user profile** (You), will allow them to view and edit their profile information. Pressing the **dealer profile** will display the dealer's information and gives the option to call via phone or send a message to the dealer. A user can press **Invite People** to invite someone else to connect to this **LINK**. This sends the invitee an email with a link to **Register** an account.

